
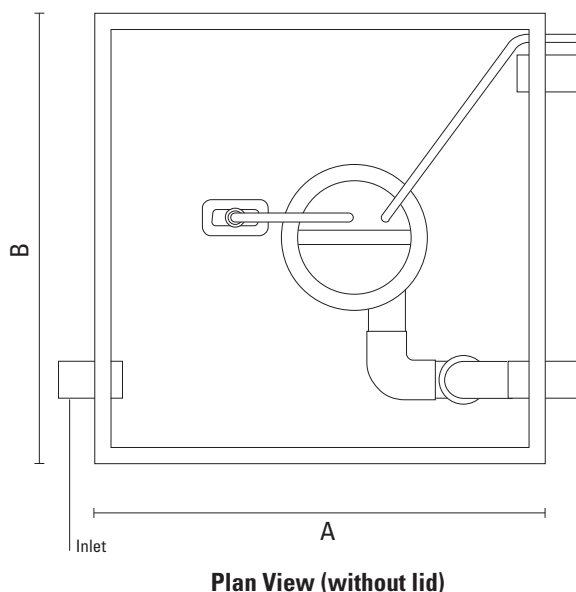


# Pump Tank

# VP13-T

- > required where waste water must be pumped to sewer or to an elevated level.
- > pump tanks may include features such as quick-release camlock connectors, non-return valves, high-level alarms and a pre-wired control station junction box. Pipe arrangement and pump selection would be made according to the particular application or duty specified.

Capacity litres	Dimensions mm				
	A	B	C in	C out	D
90	450	450	450	450	550
200	600	600	600	600	750
400	750	750	750	750	900
700	900	900	900	900	1200

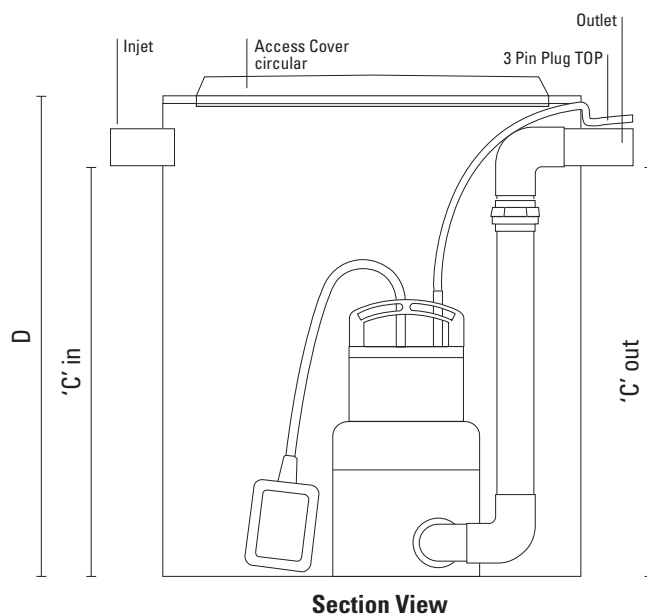

## Pump Tank model VP13-T

For above and below-ground installations

- > Manufactured from 6mm Polyvinyl Chloride (PVC), or Polypropylene (PP), this tank is suitable for above or below-ground installations
- > Above-ground tanks are fitted with a circular access cover
- > Tank dimensions and pipework positions are nominal
- > When space limitations dictate, equivalent capacity tanks can be manufactured to order
- > Tank can be supplied with submersible pump suitable for a variety of waste applications
- > Note: Pumps supplied separately

## Other products available

- > Grease Interceptors for above and below-ground installations
- > Mixing Tanks
- > Settling Tanks (Plaster Trap)
- > Acid Neutralising Tanks
- > Testing Sump
- > Solvent and Oil Interceptor
- > Petrol and Oil Interceptor
- > Water Storage Tanks
- > Custom Fabrication to order
- > Laboratory Sinks
- > Pot Sinks