


# Acid Neutralising Tank

VP6-BG

- > below-ground installation.
- > typically used in laboratories and metalwork or art/craft workshops.
- > these tanks have three baffles and must be partially filled with acid neutralising marble chips.  
 The baffle arrangement forces the liquid passing through the tank to filter through the marble chips, which have the effect of neutralising the water pH balance.

Capacity litres	Dimensions mm			
	A	B	C	D
250	900	600	470	770
300	900	600	560	860
400	900	750	600	900
500	900	750	740	1040
600	1250	750	640	940
750	1400	750	720	1020
1000	1400	900	800	1100

- > Cast Iron Cover (supplied separately)

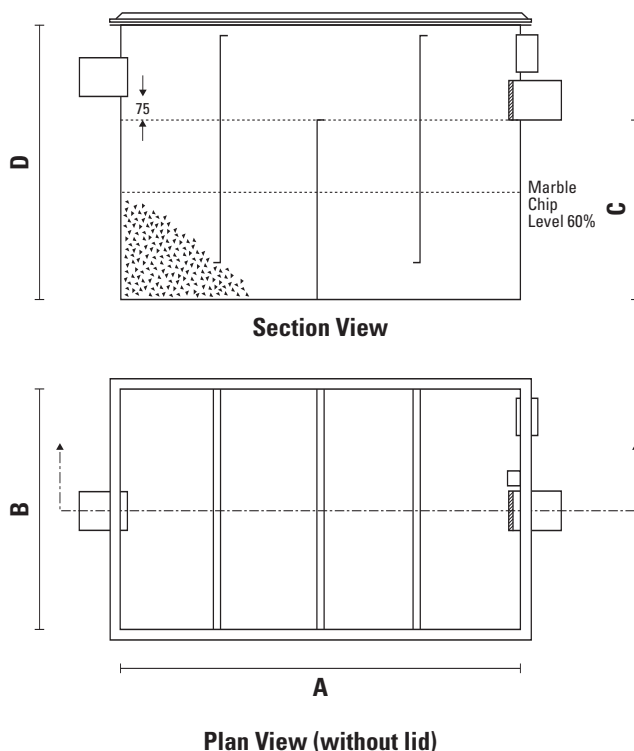

- > Marble Chips supplied separately  
 1 x 25kg bag required per 40 litre water capacity

## Acid Neutralising Tank model VP6-BG

For below-ground installations

- > Manufactured from 6mm Polyvinyl Chloride (PVC), or polypropylene, this tank is suitable for below-ground installations
- > The tank must be surrounded with 100mm thick concrete walls and base
- > Inlet and outlet pipes are 100mm nb. unless otherwise specified
- > Access covers (supplied separately) capable of being removed by one man should be fitted on top
- > Tank dimensions and pipework positions are nominal and in all cases conform to Trade Waste recommendations
- > When space limitations dictate, equivalent capacity tanks can be manufactured to order

## Other products available

- > Grease Interceptors for above and below-ground installations
- > Mixing Tanks
- > Settling Tanks (Plaster Trap)
- > Testing Sump
- > Solvent and Oil Interceptor
- > Petrol and Oil Interceptor
- > Water Storage Tanks
- > Custom Fabrication to order
- > Laboratory Sinks
- > Pot Sinks